


A2 TYP Schlauchschelle

PATENTED PRODUCT

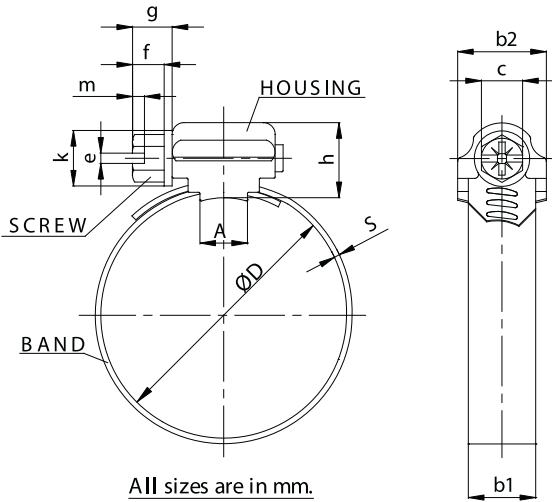

All sizes are in mm.

Tabelle Drehmomente

Spannbereich (mm)	Empfohlenes Anzugsdrehmoment (Nm)	Anzugsdrehmoment max (Nm)	Leerlaufdrehmoment (Nm)
19-26	4,5	5,5	1
20-30	4,5	5,5	1
20-32	4,5	5,5	1
25-42	4,5	5,5	1
28-48	4,5	5,5	1
30-45	4,5	5,5	1
32-50	4,5	5,5	1
38-58	4,5	5,5	1
40-60	4,5	5,5	1
44-64	4,5	5,5	1
50-70	5	6,5	1
60-80	5	6,5	1
70-90	5	6,5	1
80-100	5	6,5	1
85-103	5	6,5	1
90-110	5	6,5	1
100-120	5	6,5	1
110-130	5	6,5	1
115-135	5	6,5	1
120-140	5	6,5	1
130-150	5	6,5	1
140-160	5	6,5	1
146-164	5	6,5	1

Empfohlene Anzugsgeschwindigkeit 300 rpm.
Verfügbar DIN 3017-TS12091

Größentabelle und Technische Daten

Artikel-Nr.	Spannbereich		VPE Box	Gewicht per box (kg)	S ±0.05	b1 ±0.25	b2 ±0.3	c -0.2	k ±0.2	f ±0.3	g ±0.2	h ±0.4	m ±0.2	e ±0.1	n ±0.4
	mm	Zoll													
A2-01	19-26	3/4" - 1 1/32"	1000	16,1	0,8	10	12,5	7	8,3	5,8	6,5	11	1,5	1,4	9,4
A2-02	20-30	3/4" - 1 3/16"	1000	16,9											
A2-03	23-35	7/8" - 1 13/32"	800	14,7											
A2-04	25-40	1" - 1 21/32"	700	13,5											
A2-05	28-48	1 3/32" - 1 7/8"	600	12,3											
A2-06	30-45	1 3/32" - 1 7/8"	600	12,9											
A2-07	32-50	1 1/4" - 2"	600	13											
A2-08	40-60	1 1/2" - 2 1/4"	400	13,6											
A2-09	44-64	1 3/4" - 2 1/2"	400	11,8											
A2-10	50-70	2" - 2 7/8"	400	10,2											
A2-11	57-76	2 1/4" - 3"	300	8,3											
A2-12	60-80	3 18/32" - 3 1/4"	100	8,9											
A2-13	70-90	3" - 3 20/32"	100	9,5											
A2-14	80-100	3 11/32" - 4 1/16"	100	3,7											
A2-15	85-103	3 11/32" - 4 1/16"	50	3,9											
A2-16	90-110	3 20/32" - 4 11/32"	50	2,3											
A2-17	100-120	4 1/8" - 4 3/4"	50	2,35											
A2-18	110-130	4 1/2" - 5 5/16"	50	2,4											
A2-19	115-135	4 1/2" - 5 5/16"	50	2,5											
A2-20	120-140	5 1/8" - 5 3/4"	50	2,6											
A2-21	130-150	5 3/4" - 6 7/16"	50	2,65											
A2-22	140-160	6"	50	2,6											
A2-23	146-164	6"	50	2,65											

Material

W1	Band	: 1.0330 [DC01 (C590) Qualitäts Stahl / Keine Verwendung von Chrom (VI)]
	Gehäuse	: 1.0330 [DC01 (C390) Qualitäts Stahl / Keine Verwendung von Chrom (VI)]
	Schraube	: 1.5525 [(20MnB4) Spezialbeschichtet]
	Salzwassersprüh test	: 100 Stunden

Der Salzwassersprüh test wird gemäß ASTM B117-Standards durchgeführt..

