


14 mm Gelenkbolzenschelle



Größentabelle und Technische Daten

Artikel-Nr.	Größe Zoll	Spannbereich (mm)	VPE Box	b (mm)	Schraube	Schlüsselweite	s (mm)
TOK-01	1 1/12" - 1 5/8"	35-40	50	14	M5	11	0,8
TOK-02	1 9/16" - 1 11/16"	38-43	50				
TOK-03	1 1/8" - 1 3/4"	41-48	50				
TOK-04	1 1/4" - 1 13/16"	44-51	50				
TOK-05	1 7/8" - 2"	48-56	50				
TOK-06	2" - 2 5/32"	51-59	50				
TOK-07	2 5/32" - 2 5/16"	54-62	50				
TOK-08	2 5/16" - 2 1/2"	57-65	50				
TOK-09	2 3/8" - 2 5/8"	60-68	50				
TOK-10	2 1/2" - 2 11/16"	63-72	50				
TOK-11	2 5/8" - 2 15/16"	67-75	50				
TOK-12	2 11/16" - 3"	70-78	50				
TOK-13	2 7/8" - 3 1/8"	73-81	50				
TOK-14	2 15/16" - 3 1/4"	76-84	50				
TOK-15	3 1/8" - 3 11/32"	78-86	50				
TOK-16	3 1/8" - 3 1/2"	79-87	50				
TOK-17	3 5/16" - 3 9-16"	82-91	50				
TOK-18	3 11/32" - 3 9/16"	86-94	50				
TOK-19	3 5/16" - 3 9/16"	89-97	50				
TOK-20	3 11/32" - 3 9/16"	90-98	50				
TOK-21	3 9/16" - 3 13/16"	92-100	50				
TOK-22	3 9/16" - 3 13/16"	95-103	50				
TOK-23	4 1/16" - 4 5/16"	101-110	50				
TOK-24	4 1/16" - 4 5/16"	103-111	50				
TOK-25	4 3/8" - 4 3/4"	105-113	50				
TOK-26	4 3/32" - 4 3/8"	108-116	50				
TOK-27	4 3/32" - 4 3/8"	114-122	50				
TOK-28	4 3/8" - 4 3/4"	116-124	25				
TOK-29	4 3/4" - 5 1/8"	121-129	25				
TOK-30	5 1/8" - 5 1/2"	127-135	25				
TOK-31	5 5/16" - 5 3/4"	133-141	25				
TOK-32	5 1/2" - 5 7/8"	140-148	25				
TOK-33	5 3/4" - 6 1/6"	146-154	25				
TOK-34	5 7/8" - 6 3/8"	152-160	25				
TOK-35	6 1/6" - 6 1/2"	159-167	25				
TOK-36	6 1/2" - 6 13/16"	165-173	25				

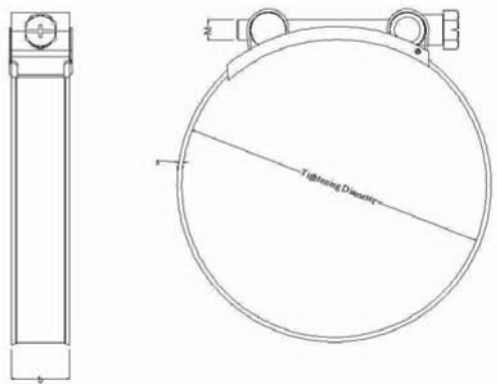

Material

	Band	: 1.4016 [(X6Cr17) Magneticst/st]
	Schraube	: 1.5525 [(20MnB4) Spezial Verzinkt]
	Salzwassersprühtest	: Schraube 100 Stunden ; Band& Inneres Blatt 200 Stunden

Der Salzwassersprühtest wird gemäß ASTM B117-Standards durchgeführt..

