


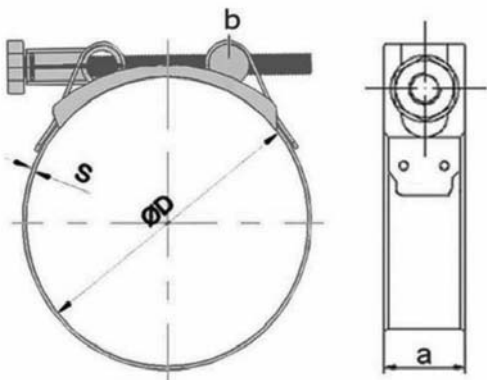

Material

	Band & Gehäuse	: 1.4301 [(X5CrNi 18-10) Antimagnetischst/st]
	Schraube	: 1.4567 [(X3CrNiCu 18-9-4) Antimagnetischst/st]
	Salzwassersprüh test : 800 Stunden	

Größentabelle und Technische Daten

Artikel-Nr.	Größe Zoll	Spannbereich (mm)	VPE Box	Gewicht per box (kg)	b (mm)	Schraube	Schlüsselweite	s (mm)
TBT-01		29-31	50	3,8	25	M8	14	1,0
TBT-02	1"	31-34	50	5,4				
TBT-03		34-37	50	5,5				
TBT-04	1 1/4"	37-40	50	5,5				
TBT-05		40-43	50	5,6				
TBT-06	1 1/2"	43-47	50	6				
TBT-07		47-51	50	6				
TBT-08		51-55	50	6				
TBT-09		55-59	50	6,2				
TBT-10	2"	59-63	50	6,8				
TBT-11		63-68	50	7				
TBT-12	2 1/2"	68-73	50	7				
TBT-13		73-79	50	7,3				
TBT-14		79-85	50	7,6				
TBT-15	3"	85-91	50	7,9				
TBT-16		91-97	25	4				
TBT-17		97-104	25	4,2				
TBT-18		104-112	25	4,4				
TBT-19	4"	112-121	25	4,6				
TBT-20		121-130	25	4,7				
TBT-21	5"	130-140	25	4,9				
TBT-22		140-150	25	5				
TBT-23		150-162	25	5,2				
TBT-24	6"	162-174	25	5,4				
TBT-25		174-187	25	6,2				
TBT-26		187-200	15	3,6				
TBT-27		200-213	15	4				
TBT-28		213-226	15	4				
TBT-29		226-239	15	4,1				
TBT-30		239-252	15	4,2				

